


LIMITS	DEGREE CLASS			
	A	B	C	D
<10	±0.02	±0.05	±0.10	±0.15
10-50	±0.05	±0.10	±0.15	±0.20
50-120	±0.10	±0.15	±0.20	±0.25
120-300	±0.15	±0.20	±0.25	±0.30
300-500	±0.20	±0.25	±0.30	±0.35
500-1000	±0.25	±0.30	±0.35	±0.40
1000-1500	±0.30	±0.35	±0.40	±0.45
ANGLE	±0.2°	±0.5°	±1.0°	±1.5°

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	2021.04.15	

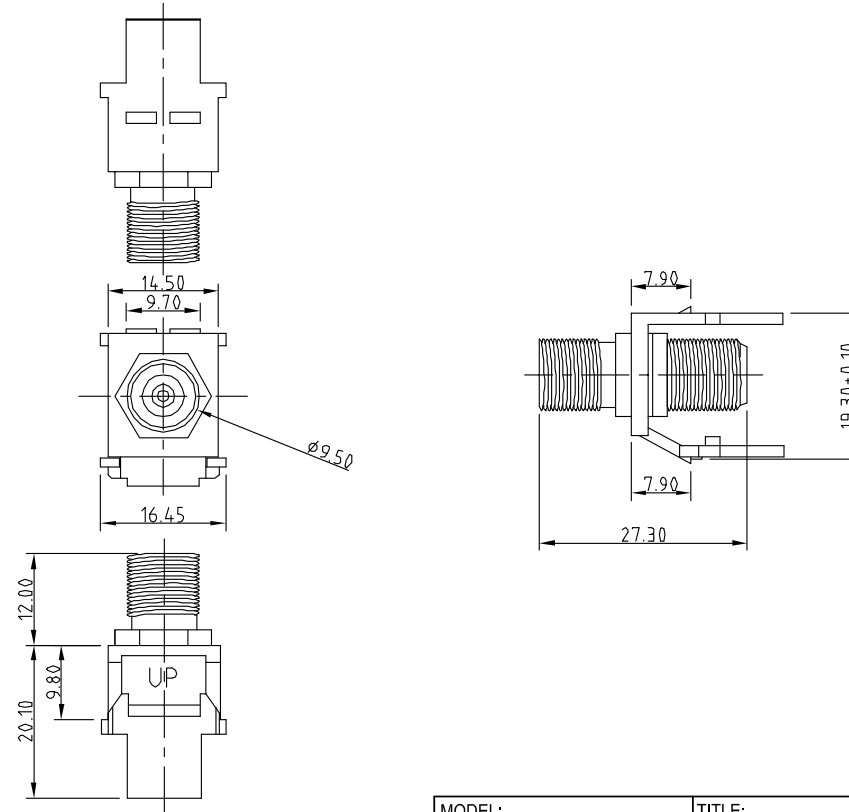

PHYSICAL CHARACTERISTICS

HOUSING MATERIAL: ABS

F CONNECTOR: BRASS WITH GOLD PLATING, 3GHZ BLUE INSERT

OPERATION TEMPERATURE: -10 ~ 60 °C



MODEL: S45-3209W	TITLE: F FEMALE TO FEMALE ADAPTER	Simply45[®]			
DRAWN:	PART NO.	/	UNIT	MM	
DESIGNED:	MATERIAL		SCALE	1 : 1	
CHECKED:	FINISH	/	SHEET	1 OF 1	
	TOOLING NO.		SIZE	REV.	A
APPROVED:	DWG NO.				